

# T8 LED Tube V-shape Integrated

## Features

- Warranty: 5-year limited warranty.
- Flicker free, eyesight protection.
- Efficiency:140lm/W
- Driver end-cap,easy replacing
- Input voltage: 100-277V
- Certificated: ETL/DLC
- Instant on/off, no noise/UV/shadow



V-shaped




Super bright T8 LED V-shape integrated tube is with super brightness SMD2835, which has higher lumen efficiency and perfect lighting performance.

With flicker free driver, instant start, no radiation, no noise, no mercury and other material that is harmful to human body and environment.



### Applications:


- Office lighting.
- meeting room lighting.
- hall lighting.
- hotel lighting.
- super-market.

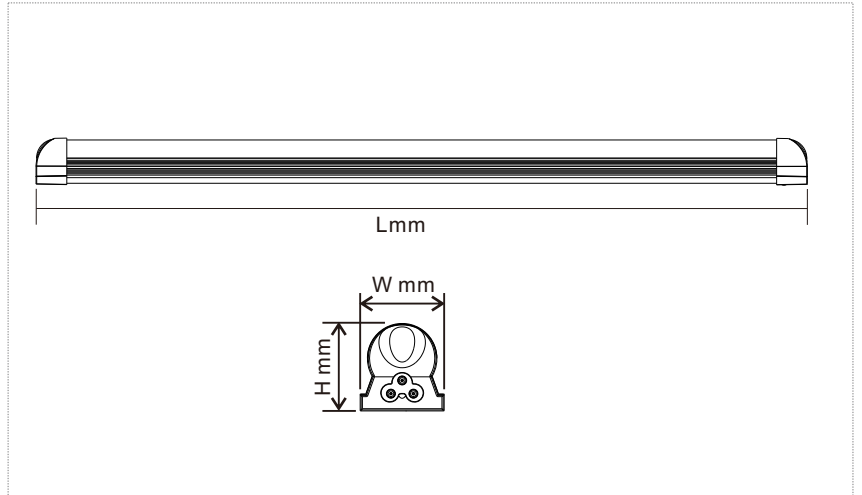


Model No	ALI-INT-2FT-18W-65K-CLEAR-V	ALI-INT-3FT-20W-65K-CLEAR-V	ALI-INT-4FT-36W-65K-CLEAR-V	ALI-INT-5FT-40W-65K-CLEAR-V	ALI-INT-6FT-48W-65K-CLEAR-V	ALI-INT-8FT-72W-65K-CLEAR-V
Watt(W)	18W	20W	36W	40W	48W	72W
Input Voltage(V)	AC100-277V 50/60Hz	AC100-277V 50/60Hz	AC100-277V 50/60Hz	AC100-277V 50/60Hz	AC100-277V 50/60Hz	AC100-277V 50/60Hz
LED Model	144pcs SMD2835	192pcs SMD2835	240pcs SMD2835	288pcs SMD2835	384pcs SMD2835	576pcs SMD2835
CCT(K)	6500K	6500K	6500K	6500K	6500K	6500K
Efficiency(lm/W)±5%	140lm/W	140lm/W	140lm/W	140lm/W	140lm/W	140lm/W
Luminous Flux(lm)±5%	2520lm	2800lm	5040lm	5600lm	6720lm	10080lm
Beam Angle(°)	120°	120°	120°	120°	120°	120°
Protection Class	Class II	Class II	Class II	Class II	Class II	Class II
IP Rating	IP20	IP20	IP20	IP20	IP20	IP20
Working Temp(°C)	-15°C~+45°C	-15°C~+45°C	-15°C~+45°C	-15°C~+45°C	-15°C~+45°C	-15°C~+45°C
Lifetime(hour)	>50000H	>50000H	>50000H	>50000H	>50000H	>50000H
THD	<15%	<15%	<15%	<15%	<15%	<15%
Size(L*W*H)mm	588*33*35mm	894*33*35mm	1198*33*35mm	1498*33*35mm	1763*33*35mm	2372*33*35mm

### Available size


Model	Dimension(mm)	Wattage	Option		Carton weight (LBS)		Carton Size (in)	Qty/CTN	20GP (pcs)	40HQ (pcs)
			PC	Color	N.W/CTN	G.W/CTN				
ALI-INT-2FT-18W-65K-CLEAR-V	L588*W33*H35	18W	Clear	6500K	22	24.5	24.6X16.1X8.9	50	23350	58000
ALI-INT-3FT-20W-65K-CLEAR-V	L894*W33*H35	20W	Clear	6500K	27	32.5	36.6X16.1X8.9	50	15750	39000
ALI-INT-4FT-36W-65K-CLEAR-V	L1198*W33*H35	36W	Clear	6500K	37.5	42.5	48.6X16.1X8.5	50	12350	30750
ALI-INT-5FT-40W-65K-CLEAR-V	L1498*W33*H35	40W	Clear	6500K	22	25.5	60.4X8.3X8.5	25	9750	24000
ALI-INT-6FT-48W-65K-CLEAR-V	L1763*W33*H35	48W	Clear	6500K	26.5	30	70.9X8.3X8.5	25	8250	20500
ALI-INT-8FT-72W-65K-CLEAR-V	L2372*W33*H35	72W	Clear	6500K	28	32.5	94.9X8.2X7.4	20	5600	14000

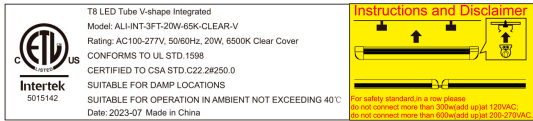

product label

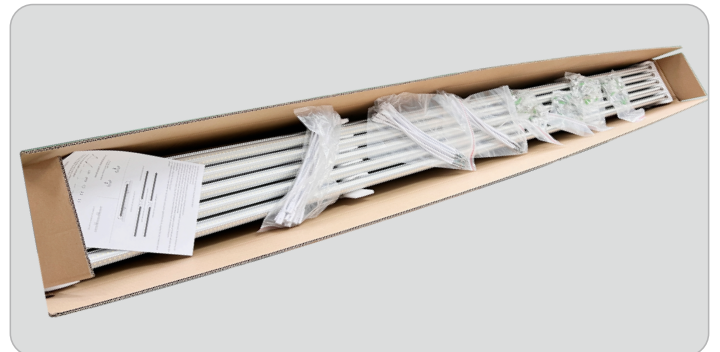

packaging

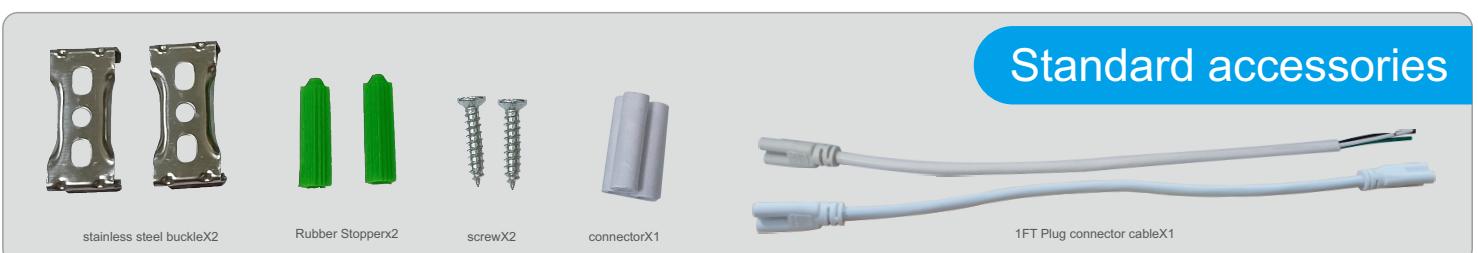

### Standard accessories

stainless steel buckleX2

Rubber StopperX2

screwX2

connectorX1

1FT Plug connector cableX1