

Catalog Number :

Project Name :

Note :


Date :

Type :

### DESCRIPTION

This 5CCT 5Wattage Commercial Downlight is 15 in 1, available in 5 wattages and 5 CCT tunable. 120-277V input voltage, 0-10V dimming.

Wet-location and IC rated, ideal use for commercial complexes, hospitality, healthcare industry, schools, shopping centers, industrial areas and hotels.

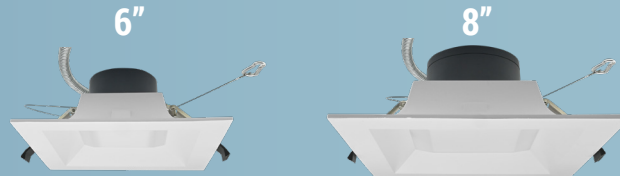

BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	SIZE	WATTAGE	CCT	LUMENS
SU-DN6IN-30W5P5C-G15	6inch	12-16-22-26-30W	2700K	1450-1905-2650-3070-3600lm
			3000K	
			3500K	
			4000K	
			5000K	

MODEL#	SIZE	WATTAGE	CCT	LUMENS
SU-DN8IN-35W5P5C-G15	8inch	16-22-26-30-35W	2700K	2110-2650-3080-3540-4200lm
			3000K	
			3500K	
			4000K	
			5000K	

### TECHNICAL SPECIFICATION

VOLTAGE	<b>120-277V</b>
POWER FREQUENCY	<b>50/60Hz</b>
POWER FACTOR	<b>&gt;0.9</b>
5CCT	<b>2700K   3000K   3500K   4000K   5000K</b>
CRI	<b>90</b>
BEAM ANGLE	<b>105°</b>
MATERIAL	<b>AL+PC</b>
COLOR	<b>White</b>
LIFESPAN	<b>≥50,000hours</b>
OPERATING TEMP	<b>(-4°F~ 113°F) -20~45°C</b>
DIMMABLE	<b>0-10V dimming</b>
RATING	<b>Suitable for Wet Locations</b>
WARRANTY	<b>5 year limited</b>

### FEATURES

- High luminous efficacy, up to 120LM/W
- High quality Aluminium shell with frosted PC diffuser

### INSTALLATION

Easy fit installation, spring-action housing clips. Suitable for most new constructions.

### DIMMING

Supports 0-10V dimming from 100% to 0%.

### ELECTRICAL

This fixture is built with the highest quality drivers, ensuring energy efficiency.

### LISTING


ETL Listed. Energy Star. FCC.Title24.



Specification subject to change without notice

Catalog Number: \_\_\_\_\_ Project Name: \_\_\_\_\_ Note: \_\_\_\_\_ Date: \_\_\_\_\_ Type: \_\_\_\_\_


**Selectable wattage**  
6inch: 12-16-22-26-30W  
8inch: 16-22-26-30-35W

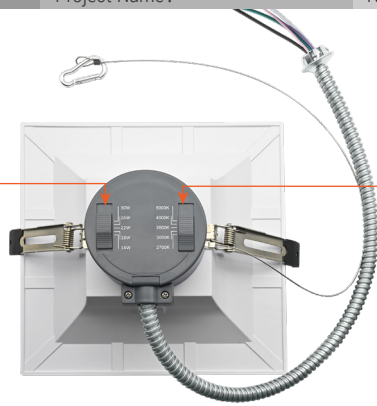

**Selectable CCT**  
2700K, 3000K, 3500K, 4000K, 5000K



**Products view**

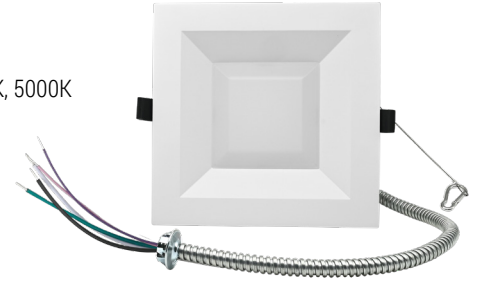

**SIZE & DIMENSION & HOLE CUTOUT&ACCESSORIES**


Size	Dimension	Hole Cutout	Accessories
6inch			
8inch			

**RECOMMENDED DIMMER**


LUTRON	INTERTEK	LEVITON
DVSTV-WH	KGM-1A010AV	IP710

**LUMINAIRE PHOTOMETRIC**

6inch

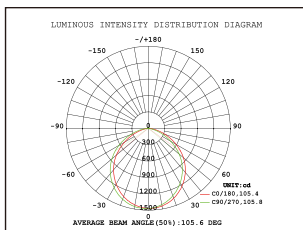

8inch

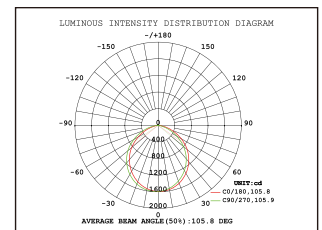

Specification subject to change without notice