

Catalog Number: \_\_\_\_\_ Project Name: \_\_\_\_\_ Note: \_\_\_\_\_ Date: \_\_\_\_\_ Type: \_\_\_\_\_

### DESCRIPTION

With color adjustable and features 355° rotation, 90° tilt, and a narrow 45° beam angle to highlight architectural or artistic elements in your home.

Suitable for Wet Location.

Ideal for both commercial and residential lighting, and are optimal for sloped ceilings, wall washing and general purpose lighting.



### Based on sample setting. Actual lumens may vary.

MODEL#	WATTAGE	5CCT	LUMENS
SU-DN4IN-9W5C-G16	9W	2700K	720lm
		3000K	780lm
		3500K	830lm
		4000K	830lm
		5000K	790lm
MODEL#	WATTAGE	5CCT	LUMENS
SU-DN6IN-12W5C-G16	12W	2700K	840lm
		3000K	890lm
		3500K	950lm
		4000K	1010lm
		5000K	930lm

### Technical Specification

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	45°
MATERIAL	Plastic+AL+lens
COLOR	White / Black
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMING	Triac Dimming
RATING	Suitable for Wet Locations
WARRANTY	5 year limited

### Features

- Aluminum die-cast body with adjustable gimbal
- Spring loaded retention arms allow for easy installation into ceilings
- Tilting gimbal light source for directional lighting

### Installation

No existing recessed housing or junction box required.

Suitable for most new constructions.

Install J-Box in ceiling beam, and insert light right into drywall opening.

### Dimming

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

Please check the recommended dimmer list in next page.

### Energy Savings

80% more energy savings than halogen lamps.



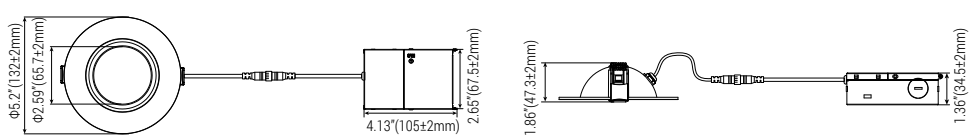


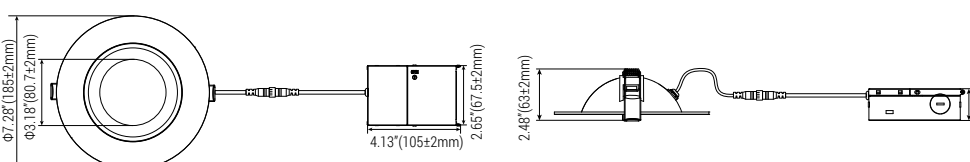


### Listing

ETL Listed. FCC.

Catalog Number:      Project Name:      Note:      Date:      Type:



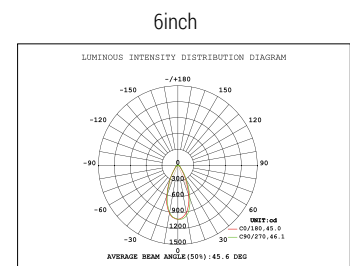
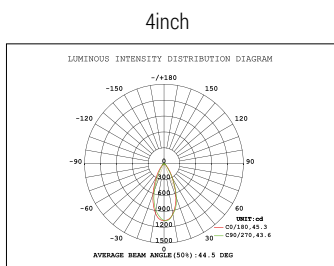
### Size & Dimension & Hole Size & Accessories

Size	Dimension	Hole Size	Accessories
4inch		 <p>4.21/64" (110mm)</p>	 Hole cutout card
6inch		 <p>6.19/64" (160mm)</p>	 Connector

### Recommended Dimmer

LUTRON				LEVITON	
CTCL-153P	DVCL-153P	CT-103PR	DVRF-6L	6672	RNL06
TGCL-153PH-WH	MSCL-OP153M	DVWCL-153PH	CTCL-150H	6674	DSL06
SLV-600P-AL	PD-6WCL	RCL-153RNL			

### Luminaire Photometric



Specification subject to change without notice