



Description



NETWORK's LED Post Top is perfect for Area Lighting and new construction applications in industrial outdoor applications, such as gardens, roads, pathways, and outdoor applications. Photocell and motion sensor available. A 3CCT & 4Wattage DIP switch helps the customer save SKUs. Innovative field optical-select capability accomplished by one integrated lens.

Application

- Gardens
- Roads
- Pathways
- Outdoor Residential
- Outdoor Commercial

Certificate

- UL
- DLC



Key Features

- Innovative Optic Selectable capability accomplished 3 different distribution (T3/T4/T5) in one fixture.
- Three mounting brackets allow pole mount, and direct mount installations.
- High efficacy up to 145lm/W.
- 3CCT(4000/5000/5700K) and 4 Wattages Selectable offer SKU reduction.
- Automated Dusk to Dawn photocell functionality.
- Plug-in socket microwave motion sensor available.
- Emergency driver available.

**Die-cast aluminum housing
provides great heat dissipation**



Photocell On/Off
Field-adjustable CCT
Field-adjustable Wattage
Field-adjustable Lighting Distribution

3 Kinds of Mounting Bracket






Performance Summary

Model NO. #	Size	Watts	CCT	LPW	Voltage	DIM	CRI	Distribution
SU-PT-150W-CCT-G1	16"	150/120/100/80W Selectable	3CCT Selectable 4000K 5000K 5700K	150lm/W	AC120-277V	0-10V	>70	T3/T4/T5 Selectable

Remarks: 1.All above efficacy and lumens are subject to CRI>70 @4000K, please check IES files for accurate data.
 2.SU-PT-150W-CCT-G1, xC: Use any character to represent the shell color. The default null value is brown, black is represented by BL, and white by WH.
 3. Factory default settings: Photocell is ON, T5, Max wattage, highest CCT.

Lighting Distribution

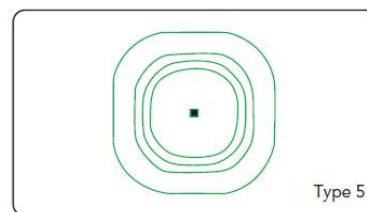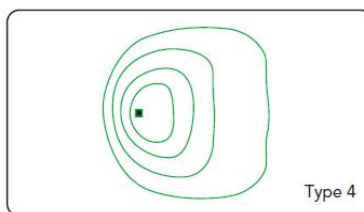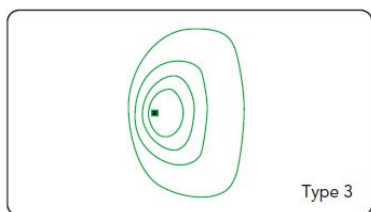

Performance

- LED Type: SMD2835
- Power Factor: ≥ 0.90
- Frequency: 50/60 Hz
- IP Rating: IP65
- THD: 20%
- Surge Protection: L/N 6KV, L/N-P 6KV
- Operating Temp.: -40°F to 122°F (-40°C to +50°C)

Construction

- Lens: Polycarbonate
- Housing: Die-cast Aluminum
- Finish: Bronze(Standard), Custom finishes available


Mounting

- Pole Mount Bracket


- Direct Mount Bracket

○ Arm Mount(Square)


○ Arm Mount(Round)




Pole Mount



Single Arm Mount



Arm Mount(Square)




Arm Mount(Round)

Accessories (Sold separately)



Picture	Item #	Description
	SU-PT-Y-G1	Mounting Bracket, Pole Mount, Bronze finish
	SU-PT-D-G1	Mounting Bracket, Direct Mount, Bronze finish
	SU-PT-7-G1	Mounting Bracket, Single Arm Mount, Bronze finish
	SU-HD06R	604675466316
	SU-HD07VR-A-1	PHOTOCELL & DAYLIGHT HARVESTING SENSOR

Product Dimension


(unit: mm & inch)

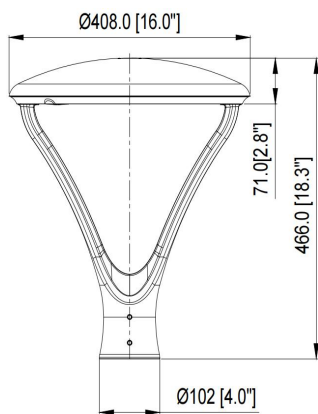


PT02Y

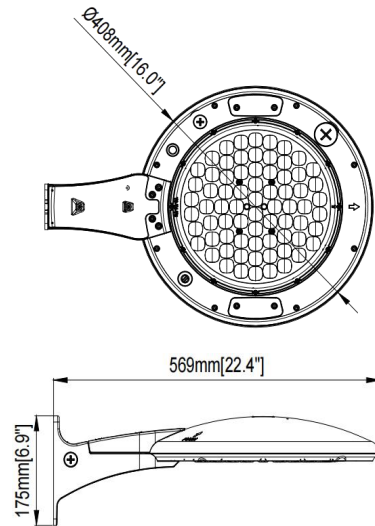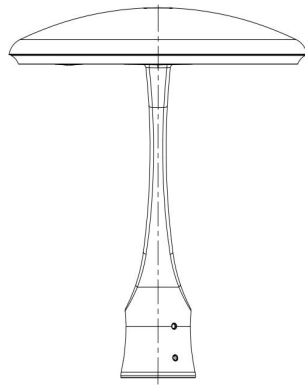

PT02D

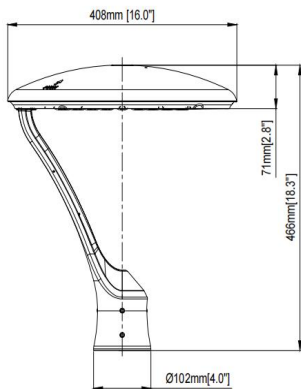

PT02S



Packing Info. (Factory Default)

Fixture with mounting bracket

Product Size(inch & mm)	Net Weight (kg)	Gross Weight (kg)	Carton Size(mm)	Q'ty/CTN (PCS)	20GP (PCS)	40HQ (PCS)
SU-PT-150W-CCT-G1 Post top fixture	4.4	6.00	418*418*100	1		
SU-PT-Y-G1	9.37	10.50	381*442*269	8		
SU-PT-D-G1	8.8	9.60	398*555*434	5		
SU-PT-7-G1	7.16	8.76	398*555*434	5		