



Description


NETWORK's LED Area light is perfect for Area Lighting and good for medium-height parking lot poles and new construction applications in industrial outdoor applications, such as parking lots, roadways, and outdoor applications. Photocell and motion sensor available. A 3 CCT & 3 Wattage DIP switch helps the customer to save SKUs. Innovative optic selectable by DIP switch.

Application

- Parking lots
- Roadways
- Outdoor applications


Certificate

- UL



Key Features

- High efficacy up to 170lm/W
- Innovative optic selectable by one integrated lens(T3/T4/T5).
- 3CCT(3000/4000/5000K) and 3 Wattages Selectable offer SKU reduction.
- 4 kinds of mounting brackets available (SF, SR, TR,DI).
- Plug-in microwave motion sensor available.
- 10KV surge protector + Plug in sensor base+ Breathing valve+ Built in Photocell.

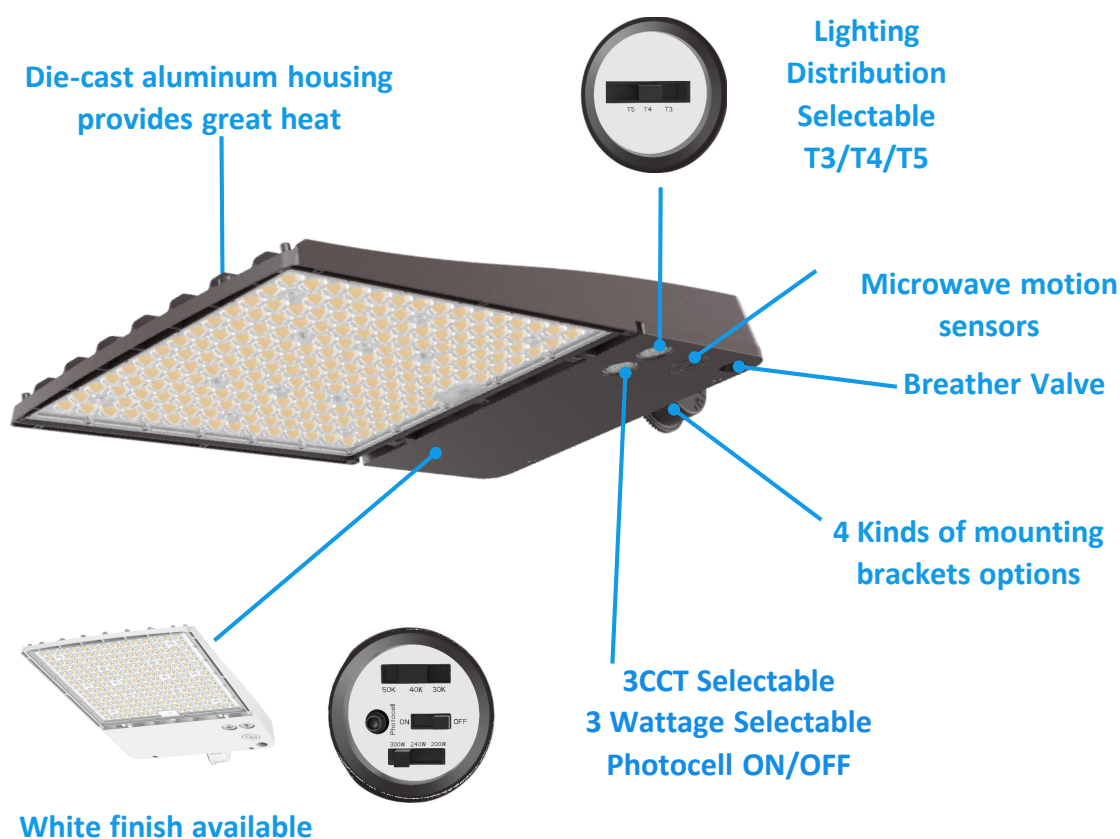

Performance Summary

Model NO. #	Watts	CCT	LPW	Lumens(±10%)	Voltage	DIM	CRI	Beam Angle
SU-SB-300W-TCP-G1 645656261490	300/240/200W Selectable	CCT Selectable 3000K 4000K 5000K	170lm/W	51000LM@300W	AC120-277V	0-10V	CRI>70	T3/T4/T5 Optional
SU-SB-300W-TCP-G1 (WW) 649226869307								

Remarks: 1. All above efficacy and lumens are subject to CRI>70 @5000K T3, please check IES files for accurate data.

2. SU-SB-300W-TCP-G1,

0-10 V dimming driver, 3 wattages selectable and 3CCT selectable.

3. Factory default settings: Max wattage, 5000K.

Performance

- LED Type: SMD2835
- Power Factor: ≥0.90
- Frequency: 50/60 Hz
- IP Rating: IP65
- THD: 20%
- Surge Protection: L/N 6KV, L/N-P 6KV
- Operating Temp.: -40°F to 122°F (-40°C to +50°C)
- Storage Temp.: -40°F to 158°F (-40°C to +70°C)

Construction

- Lens: Polycarbonate
- Housing: Die-cast Aluminum
- Finish: Bronze, White, Custom finishes available

Mounting Bracket (Sold separately)


Picture	Item #		Description
	SU-SB-SF-G1/2/3 300W (BRONZE) 721702726882	SU-SB-SF-G1/2/3 300W (WW) 649226869314	Mounting Bracket, Slip Fitter(SF), Bronze& White finish
	SU-SB-TR-G1/2/3 300W (BRONZE) 645656261544	SU-SB-TR-G1/2/3 300W (WW) 649226869321	Mounting Bracket, Trunnion Mount(TR), Bronze& White finish
	SU-SB-SR-G1/2/3 300W (BRONZE) 721702726899		Mounting Bracket, Square/Round Pole Bracket(SR), Bronze finish
	SU-SB-DI-G1/2/3 300W (BRONZE) 645656261568		Mounting Bracket, Square Bracket(DI), Bronze& White finish

Accessories (Sold separately)

Picture	Description
	SU-SB-GS-G1/2 300W (BRONZE)+645656261551 Glare shield
	SU-HD07VR-A-1+679065283231 PHOTOCCELL & DAYLIGHT HARVESTING SENSOR
	SU-HD06R + 604675466316
	10KV Surge Protector for AC120-277V


Product Dimension

(unit: mm & inch)

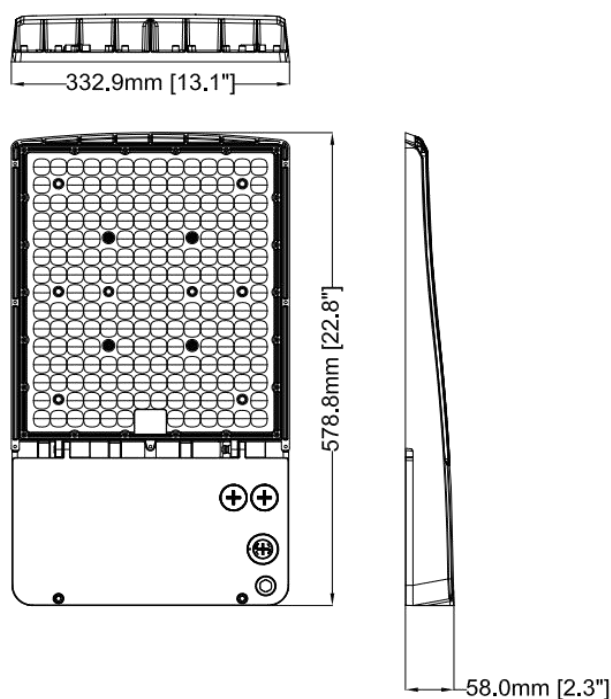


SU-SB-300W-TCP-G1


Dimension for Mounting Bracket




SU-SB-SF-G1/2/3
300W



SU-SB-SR-G1/2/3
300W



SU-SB-TR-G1/2/3
300W

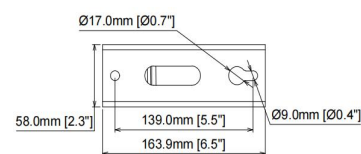

SU-SB-DI-G1/2/3
300W

Packing Info. (Factory Default)

Fixture with mounting base

Product Size(inch & mm)	Net Weight (kg)	Gross Weight (kg)	Carton Size(mm)	Q'ty/CTN (PCS)	20GP (PCS)	40HQ (PCS)
240/300/400W 30.5"*13.1"*2.3" 774.8*332.9*57.4mm	TBD	TBD	642*370*110	1	1134	2796

(Mounting Bracket only)

Model	Product Weight (kg)		Package Weight (kg)		Carton Size(mm)	Q'ty/BOX (PCS)	Q'ty/CTN (PCS)	20GP (PCS)	40HQ (PCS)
	N.W./PC	G.W./PC	N.W./CTN	G.W./CTN					
SF	0.56	N/A	5.60	6.26	461×192×200mm	1	10	15840	35640
SR	1.77	1.86	14.16	15.58	385×365×260mm	1	8	5696	13680
TR	1.10	1.14	11.00	11.8	327×244×192mm	1	10	17270	41730
DI	1.17	N/A	7.02	7.73	415×227×182mm	1	6	9720	21840