

# LED SHOEBOX LIGHT G7

## Description :

NETWORK's New Generation LED Shoebox parking light provides a solution for parking lot and open area applications. Standard finish is dark bronze polyester powder finish with other architectural colors available. In addition to diminishing energy costs, the fixtures virtually eliminate maintenance expenses with an L70 lifetime of 50,000 hours. UL classified/ recognized, UL listed, DLC premium listed.



## Features:

- Adjustable installation angles available.
- Type IV medium available rotated right or left 90° and 180°.
- SR universal bracket one person installation optional.
- Plug-in microwave motion sensor.
- Dimmable: 1-10V.



## Applications:


Outdoor pole/arm-mounted area and roadway luminaires architectural lighting, bridge, car park, garden, highway, petrol station, pooling lighting, sport Lighting, sport yard, square lighting, tunnel Lighting.




## Parameters :

|                       |                                                 |
|-----------------------|-------------------------------------------------|
| Model No.             | SU-SB-150W-CCT-G7                               |
| Wattage               | 150W                                            |
| Lumen                 | 21000lm                                         |
| Efficacy              | 140lm/W<br>( $\pm 10\%$ )                       |
| Lighting Distribution | Type IV                                         |
| Input Voltage         | 277-480VAC 50/60Hz                              |
| Color temperature     | 5000K                                           |
| CRI                   | Ra> 70                                          |
| THD                   | <20%                                            |
| Additional Function   | Plug in motion sensor base (White color sensor) |
| Certification         | UL/cUL/DLC Premium                              |
| IP Rating             | IP65                                            |
| IK Rating             | IK08                                            |
| Surge protection      | L/N-PE: 10KV, L-N: 6KV                          |
| Housing Material      | Die-cast Aluminum                               |
| Lens                  | Polycarbonate Lens                              |
| Life Time             | L70 @ 50,000hrs                                 |
| Operating Temp        | 22°F to 113°F (-30°C to +45°C)                  |
| Storage Temp          | -40°F to 158°F (-40°C to +70°C)                 |
| Mounting Bracket      | Direct mounting/Slip fitter/Yoke mounting       |
| Warranty              | 5 Years                                         |

## Appearance :

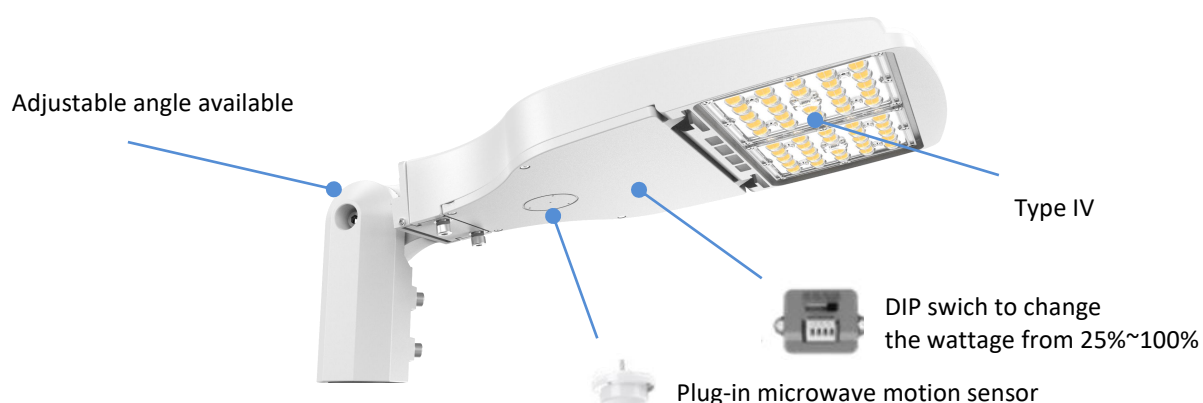

Product Dimensions :

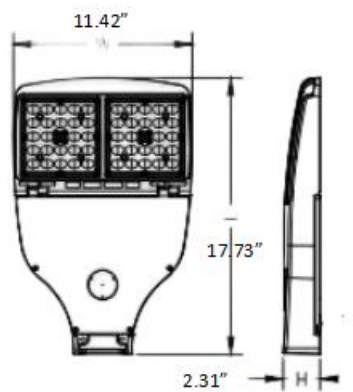

SU-SB-150W-CCT-G7  
649226868928

Packing :

| Model             | Product Dimension<br>(mm&inch)       | Mounting<br>Bracket | Product Weight (Kgs) |          | Carton Size<br>(mm&inch)            | Q'ty/CTN<br>(PCS) | 20GP<br>(PCS) | 40HQ<br>(PCS) |
|-------------------|--------------------------------------|---------------------|----------------------|----------|-------------------------------------|-------------------|---------------|---------------|
|                   |                                      |                     | N.W./ctn             | G.W./ctn |                                     |                   |               |               |
| SU-SB-150W-CCT-G7 | 450*290*58.7mm<br>17.73"*11.42"*2.31 | SU-SB-SR-G7         | 7.08                 | 8.00     | 605*345*137mm<br>23.82"*13.58"*5.40 | 1                 | 875           | 2125          |