



Product Features

Construction

- Housing: durable steel construction.
- Finish: powder coated, post-painted white
- Large wiring compartment and multiple knock-outs to accommodate lighting controls

Optics

- 5 CCTs Selectable Option
- High impact, acrylic lens comes standard to protect the LEDs and minimize glare
- Delivers bright, white light and excellent uniformity

Electrical

- 5 Powers Selectable Option
- 120-277 0-10V dimming
- Easy-to-access wiring compartment
- System rated for long 50,000 hour life
- Efficiently delivers >130 LPW

Certification

ETL Listed. DLC Premium.

Warranty

5-year Limited warranty.



Order Information

Size	Part No.	Power	Luminous Efficacy	Luminous Flux	Input Voltage	CCT
4FT	SU-WP-4FT50W-xxK G3	15W-30W-35W-40W-50W	130 lm/W	6500 lm	120-277V	5CCT


"Note: 5CCT=3000K-3500K-4000K-5000K-6500K"

Specifications

		4ft
	Dimensions	48" x 10" x 3.2"
	Voltage	120-277V / 120-347V
Certifications	DLC Premium	Low Bay
	Safety	ETL
Control Feature	Dimming Status	Continuous Dimming to 10% or below
	Communication Protocol	0-10V Wired Communication Protocol (Option)
	Integral Controls	Has Integral Controls (Option)
	Sensor Type	Occupancy sensor, Daylight dimming (Option)
Photo metric	CCT	5CCTs (3000K-3500K-4000K-5000K-6500K)
	SDCM	≤6
	Beam Angle	120°
	Ra	>80
	R9	>0
	Duv	≤ 0.006
	Rated Voltage	100-277 ACV / 100-347 ACV
	Frequency	50/60Hz
	THD	≤ 20%
	Surge Protection	2KV
	Power Factor	≥ 0.9
	Flicker	Flicker Free (Option)
Lifetime	L70	≥ 50000
	L90	≥ 36000
	Warranty	5 Years
Operation	Start Time	≤ 1S
	Operating Temp	-4°F - 104°F
	Storage Temp	-22°F - 140°F
	Housing/Case	Steel
	Optical-Lens	PC Frosted /Clear
	Environment	Indoor
	Ingress Protection	IP22 Rating

Dimension

	L×W×H (inch)
2FT	24" x 10" x 3.2"
4FT	48" x 10" x 3.2"

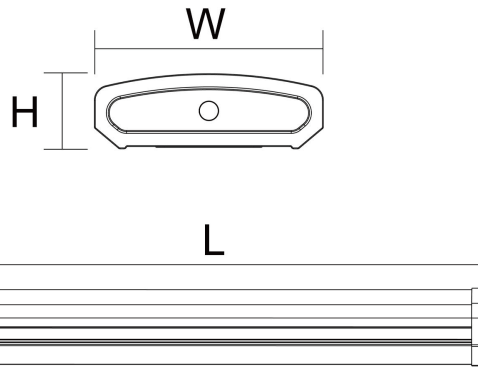

Packing information

Size	Qty/Ctn (pcs)	Outer box (in)	G.W/Ctn (lbs.)
4FT	5	48.2x11x18	55 LB

Note

- 1.The installation and maintenance must be completed by electricians or professionals.
- 2.Please cut off the power before installation and maintenance.
- 3.The thermally insulating material is not allowed to cover the fixture.
- 4.Please keep away from the corrosive substance, and keep the fixture dry and clean.
- 5.Working temperature: -4°F~104°F, storage temperature: -22°F~140°F.