



Product Features

1. High Efficacy: Design delivers up to 130LPW.
2. Expected Life: Projected life of at least 75,000 hours.
3. Construction : Housing constructed of Aluminum, die-formed, cold-rolled steel.
4. Lens : Frosted/Clear, impact-resistant polycarbonate.
5. Electrical : 100-277V AC Input, 50/60Hz.
6. Driver : High-performance driver features over-voltage, over-current, and short-circuit protection.
7. Certification : ETL Listed. DLC Premium.
8. Warranty : Limited 5-year warranty.



Order Information


Size	Part No.	Power	Luminous Efficacy	Luminous Flux	Input Voltage	CCT	Angle
2FT	SU-LS2G-2FT20W-65K	20W	130 lm/W	2600 lm	100-277V	1CCT	270°
3FT	SU-LS2G-3FT30W-65K	30W	130 lm/W	3900 lm	100-277V	1CCT	270°
4FT	SU-LS2G-4FT42W-65K	42W	130 lm/W	5460 lm	100-277V	1CCT	270°
5FT	SU-LS2G-5FT42W-65K	42W	130 lm/W	5460 lm	100-277V	1CCT	270°
6FT	SU-LS2G-6FT52W-65K	52W	130 lm/W	6760 lm	100-277V	1CCT	270°
8FT	SU-LS2G-8FT72W-65K	72W	130 lm/W	9360 lm	100-277V	1CCT	270°

"Note: 1CCT=6500K"


Specifications

		2FT20W	3FT30W	4FT42W	5FT42W	6FT52W	8FT72W
Key Parameters	Dimensions	2ft	3ft	4ft	5ft	6ft	8ft
	Linkable	Max 330W					
	Voltage	100-277V					
	Wattage	20W	30W	42W	42W	52W	72W
	Efficacy	130lm/W					
	Lumens	2600 lm	3900 lm	5460 lm	5460 lm	6760 lm	9360 lm
Certifications	Safety	ETL CETL					
Photo Metric	CCT	6500K					
	SDCM	≤6					
	Beam Angle	270°					
	Ra	>80					
	R9	>0					
Electrical	Duv	≤ 0.006					
	Wattage	20W	30W	42W	42W	52W	72W
	Current	0.2A	0.3A	0.42A	0.42A	0.52A	0.72A
	Rated Voltage	100-277V AC					
	Frequency	50/60Hz					
	THD	≤ 20%					
	Surge Protection	2KV					
Power Factor	≥ 0.9						
Lifetime	L70	≥ 36,000 hours					
	L90	≥ 50,000 hours					
	Warranty	5 Years					
Operation	Start Time	≤ 1S					
	Operating Temp	-4°F - 104°F					
	Storage Temp	-22°F - 140°F					
	Housing/Case	Aluminum					
	Optical-Lens	PC Frosted / Clear / Clear Strip					
	Environment	Indoor					
	Ingress Protection	IP20					


Installation

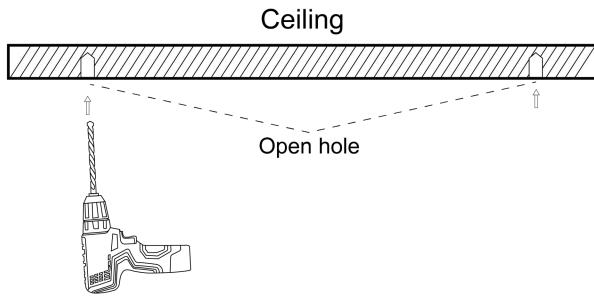


①. Make a right position and screw hole.

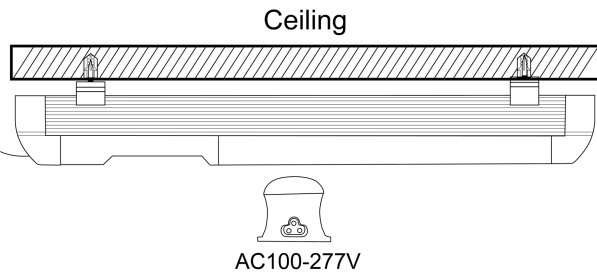

③. Fixed rotatable clips & fixture with tighten screws.

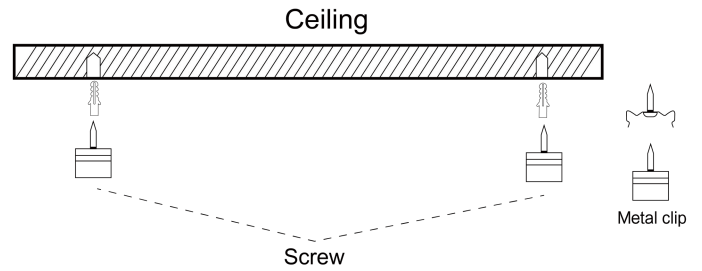


②. Fixed the clips between ceiling and light with screws.

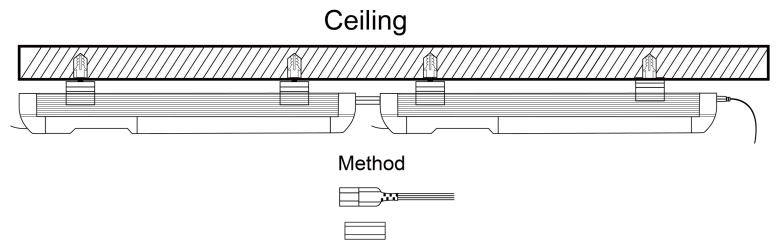


④. Connected up by connector, done

Caution The Intergrated Tubes Can Be Connected Up To Total 277V:660W

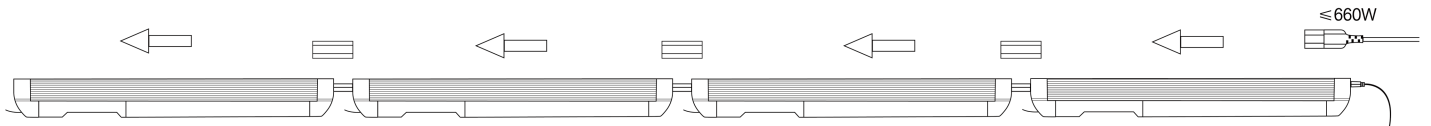

Dimensions

Length	L	W	H
2FT	21.2 in	1.2 in	1.4 in
3FT	33.4 in	1.2 in	1.4 in
4FT	45.2 in	1.2 in	1.4 in
5FT	57.0 in	1.2 in	1.4 in
6FT	68.4 in	1.2 in	1.4 in
8FT	91.1 in	1.2 in	1.4 in

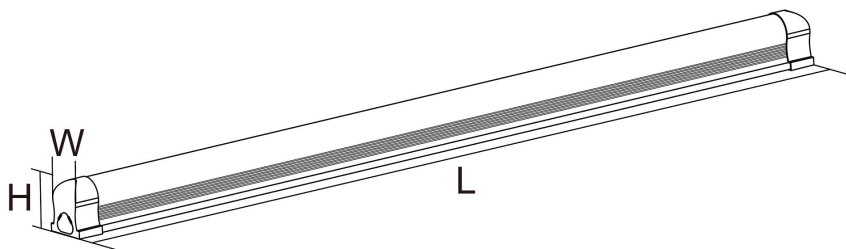

Packing information

Length	Qty/Ctn (PCS)	Outer box	G.W / Ctn	Container 20GP(28 m ²)	Container 40HQ(68 m ²)
2FT	25	554 x 185 x 205mm=0.022 m ³ 21.8 x 7.3 x 8.1 in	5.8 KG 12.8 Lbs	22000 PCS	65500 PCS
3FT	25	863 x 185 x 205mm=0.0327m ³ 21.8 x 7.3 x 8.1 in	6.9 KG 15.2Lbs	21450 PCS	48600 PCS
4FT	25	1163 x 185 x 205mm=0.045 m ³ 45.8 x 7.3 x 8.1 in	9.1 KG 20.1 Lbs	9900 PCS	31200 PCS
5FT	25	1463 x 185 x 205mm=0.056 m ³ 57.5 x 7.3 x 8.1 in	11.4KG 25.2 Lbs	7900 PCS	2490 PCS
6FT	25	1723 x 185 x 205mm=0.065 m ³ 67.8 x 7.3 x 8.1 in	13.6 KG 30.2 Lbs	7000 PCS	20400 PCS
8FT	20	2332 x 185 x 170mm=0.073 m ³ 91.8 x 7.3 x 7.1 in	12.4 KG 27.3 Lbs	5280 PCS	18000 PCS

Note

- 1.The installation and maintenance must be completed by electricians or professionals.
- 2.Please cut off the power before installation and maintenance.
- 3.The thermally insulating material is not allowed to cover the fixture.
- 4.Please keep away from the corrosive substance, and keep the fixture dry and clean.
- 5.Working temperature: -4°F~104°F, storage temperature: -22°F~140°F.