


24V 130LM/W 10 WATT COB LED TAPE LIGHT DIMMABLE SUPER BRIGHT

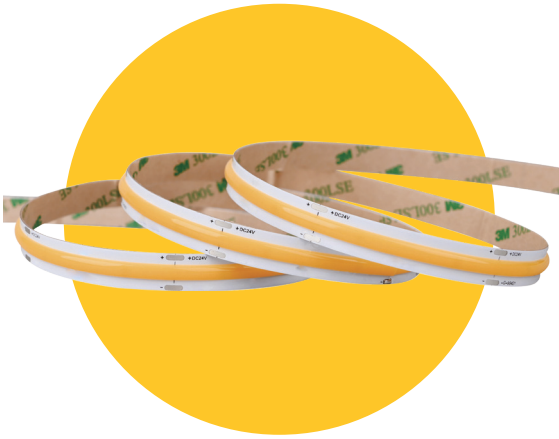

- **SU-LT24DC-27K-16.5FT**
 SOFT WHITE
2700K
- **SU-LT24DC-5K-16.5FT**
 SUPER WHITE
5000K
- **SU-LT24DC-3K-16.5FT**
 WARM WHITE
3000K
- **SU-LT24DC-65K-16.5FT**
 DAYLIGHT
6500K
- **SU-LT24DC-4K-16.5FT**
 NEUTRAL WHITE
4000K

| ITEM | SU-LT24DC-27K-16.5FT | SU-LT24DC-3K-16.5FT | SU-LT24DC-4K-16.5FT | SU-LT24DC-5K-16.5FT | SU-LT24DC-65K-16.5FT |
|-------------------|----------------------|---------------------|---------------------|---------------------|----------------------|
| DESCRIPTION | COB/10W/27K | COB/10W/30K | COB/10W/40K | COB/10W/50K | COB/10W/65K |
| VOLTAGE | 24V DC | 24V DC | 24V DC | 24V DC | 24V DC |
| WATTS | 3 FT / 10W M | 3 FT / 10W M | 3 FT / 10W M | 3 FT / 10W M | 3 FT / 10W M |
| LUMENS | 285 FT/ 1150 M | 300 FT/ 1250 M | 315 FT/ 1350 M | 315 FT/ 1350 M | 315 FT/ 1300 M |
| BEAM ANGLE | 120° | 120° | 120° | 120° | 120° |
| DIMMABLE | Yes | Yes | Yes | Yes | Yes |
| COLOR TEMPERATURE | 2700K | 3000k | 4000k | 5000k | 6500k |
| WIDTH | 10 mm | 10 mm | 10 mm | 10 mm | 10 mm |
| HEIGHT | 1.8 mm | 1.8 mm | 1.8 mm | 1.8 mm | 1.8 mm |
| CUTTABLE | 1.97" | 1.97" | 1.97" | 1.97" | 1.97" |
| CRI | 90> | 90> | 90> | 90> | 90> |
| ADHESIVE | 3M 9495 300 MP | 3M 9495 300 MP | 3M 9495 300 MP | 3M 9495 300 MP | 3M 9495 300 MP |
| PRE SOLDERED | YES | YES | YES | YES | YES |
| ROLL LENGTH | 16.4 FT / 5 M | 16.4 FT / 5 M | 16.4 FT / 5 M | 16.4 FT / 5 M | 16.4 FT / 5 M |

CONNECTORS



| ITEM | SU-48516 | SU-48517 | SU-48518 | SU-48519 |
|-------------|-----------------|-----------------|--------------------|-------------------|
| DESCRIPTION | C/PTS/CONNECTOR | C/STS/CONNECTOR | C/JUMPER/CONNECTOR | C/MULTI/CONNECTOR |

COB Tape Light features uniform illumination without the need for additional diffused covers or accessories.
Featuring a premium seamless line of light.

- Seamless COB design that eliminates virtually all LED dotting
- A continuous band of flawless light output with no pixelated hot spots-even without a lens
- Low heat generation, Channel not required for sink
- Available in 2700k, 3000k, 4000k, 5000k, 6500k
- Double and impute connection option
- 50,000 hours rated life



Warranty:
3 years



Dimmable: Inner/Master
5%



25



Double end Connector

