

# 15 WATT 120V WET RATED TAPE LIGHT



100FT

SU-STR120AC-30K-100FT-G1



SOFT WHITE  
3000K

SU-STR120AC-50K-100FT-G1



COOL WHITE  
5000K

SU-STR120AC-40K-100FT-G1



NEUTRAL WHITE  
4000K

SU-STR120AC-65K-100FT-G1



SUPER WHITE  
6500K

### Optional Accessories

- PC 180° DIRECT CONNECTOR
- PC 90° DIRECT CONNECTOR
- PC 6" WIRE CONNECTOR PC
- 12" HARDWIRE STARTER PC
- 24" WIRE CONNECTOR PC
- 24" HARDWIRE STARTER PC
- MOUNTING CLIP KIT
- PC END CAP
- GLUE TUBE

15 WATT 120V WET  
RATED TAPE LIGHT  
100 FT

ITEM	SU-STR120AC-30K-100FT-G1	SU-STR120AC-40K-100FT-G1	SU-STR120AC-50K-100FT-G1	SU-STR120AC-65K-100FT-G1
DESCRIPTION	120V/15W/COB/IP67/3K 100 FT	120V/15W/COB/IP67/4K 100 FT	120V/15W/COB/IP67/5K 100 FT	120V/15W/COB/IP67/65K 100 FT
VOLTAGE	120V	120V	120V	120V
WATTS	4.5 W/FT-15W/M	4.5 W/FT-15W/M	4.5 W/FT-15W/M	4.5 W/FT-15W/M
LUMENS	330 FT / 1100 M	360 FT / 12 00 M	345 FT / 1150 M	360 FT / 1200 M
BEAM ANGLE	120°	120°	120°	120°
DIMMABLE	Yes (Triac)	Yes (Triac)	Yes (Triac)	Yes (Triac)
COLOR TEMPERATURE	Soft White 3000k	Neutral White 4000k	Cool White 5000k	Super White 6500k
WIDTH	12 mm	12 mm	12 mm	12 mm
HEIGHT	5 mm	5 mm	5 mm	5 mm
CUTTABLE	3.94"	3.94"	3.94"	3.94"
CRI	90	90	90	90
ADHESIVE	3M 9495 300 MP	3M 9495 300 MP	3M 9495 300 MP	3M 9495 300 MP
ROLL LENGTH	100 FT / 30.5 M	100 FT / 30.5 M	100 FT / 30.5 M	100 FT / 30.5 M
PACKED	1	1	1	1

### CONNECTORS



ITEM	SU-STR120AC-180CON-G1	SU-STR120AC-90CON-G1	SU-STR120AC-6INCON-G1	SU-STR120AC-24INCON-G1
DESCRIPTION	120V 180° DIRECT CONNECTOR 5PK	120V 90° DIRECT CONNECTOR 5PK	120V 6" WIRE CONNECTOR 2PK	120V 24" WIRE CONNECTOR 2PK

### STARTER




ITEM	SU-STR120AC-6INSTA-G1	SU-STR120AC-24INSTA-G1	SU-STR120AC-12INPLU-G1
DESCRIPTION	120V 6" HARD-WIRE STARTER 2PK	120V 24" HARD-WIRE STARTER 2PK	120V 12" PLUG STARTER 1PK

### ACCESSORIES



ITEM	SU-STR120AC-MC-G1/G10	SU-STR24DC-CAP-G1/G7	SU-STR-GLUE-G1/G7/G10
DESCRIPTION	120V MOUNTING CLIP 10PK (20 SCREWS)	120V END CAP 10PK	GLUE

## Dimensions

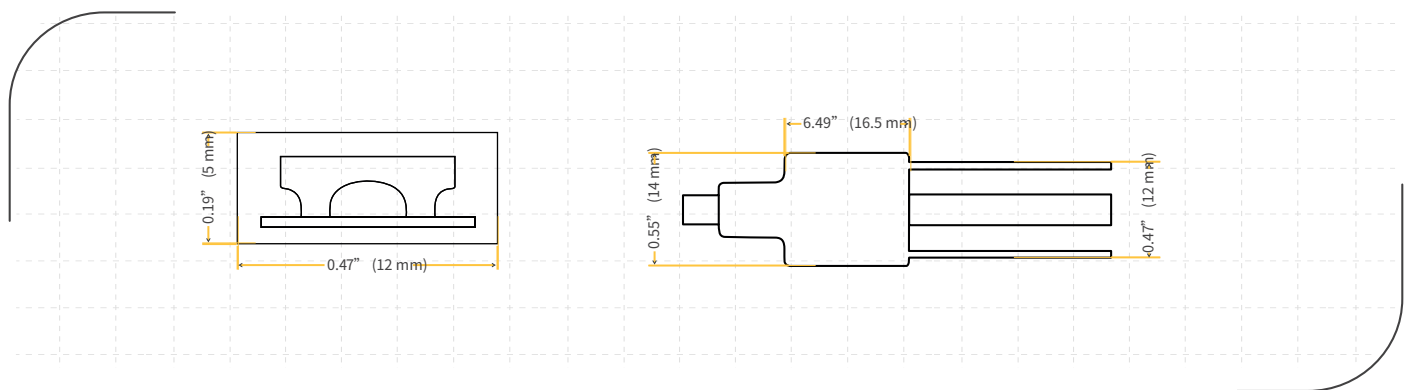

Lifetime:  
50,000 hours



Warranty:  
3 years



Dimmable:  
5%



Double end  
Connector

